

T3 TIMER INSTRUCTIONS

12/7/11

1. PLUG IN POWER CORD

2. SET DESIRED TIME

Remove cover to set the time. The time is adjustable between 1 sec. to 99 hours. Adjustment is made to the hours, minutes and seconds in turn as follows:

HOURS

Push the "MODE" button. Display will read "F3" which indicates the *hours* setting will be adjusted. Press the "MODE" button again and the number of hours is displayed. Adjust this using the "UP" or "DOWN" buttons.


MINUTES

Next set the minutes by pressing MODE button again. 'F2' is displayed. Press the MODE button again and the number of minutes is displayed. Adjust if desired.

SECONDS

Lastly, set the seconds by pressing the MODE button again. 'F1' is displayed indicating seconds. Press the MODE button again to display the seconds. Adjust if desired.

When time is set, replace the cover with screws. Settings are "remembered" if power is removed.

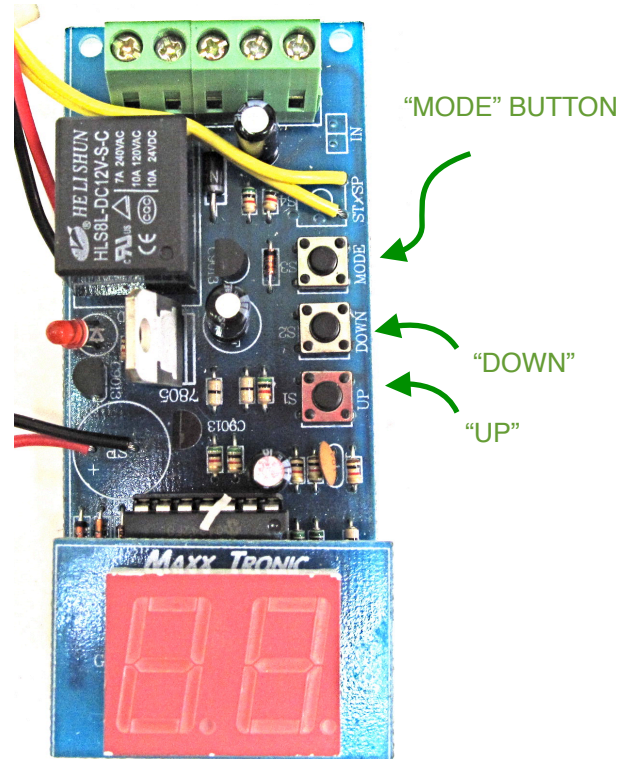

3. OPERATION

Push the green "START" button to start the timing cycle. Button illuminates during the countdown. Timer will beep five times when the timing cycle is done. Pushing the green button during the cycle will abort the countdown.

4. CHANGING RELAY STATE

The timer is shipped so the relay closes during the countdown period. If you prefer, the relay can work the opposite way so it is closed when *not* timing. To do this unplug the power cord and move the pink wire to the N.C. slot on the terminal block.

